

THERMAL TRANSFER OVERPRINTERS SVM 107-75 I SVM 107-125 I SVM 107 C



SPECIFICATIONS

High performance, low cost thermal transfer printers are versatile enough for printing fixed and variable text, data and graphics. It is ideal for reproducing barcodes, real time, sell-by dates, batch numbers, prices, source codes and much more. Brackets can be easily integrated to the machines such as vertical and horizontal form-fill-seal systems, primary labellers, thermo formers and overwrapping equipments. The units are suitable for all intermittent and continuous applications within the food, pharmaceutical cosmetics and automobile spare parts industries has the capability to code all kinds of 1D barcodes and 2D datamatrix codes.

KEY FEATURES

- Patented long life mechanical design needs no maintenance
- 107mm x 75mm and 107mm x 125mm print area for intermittent and 107x125mm for continuous
 - 600m ribbon capacity
- Print Quality 300dpi (12 dot / inch).
- The USB can be used to:
 - Move messages and configurations between printers for local based set-up
 - Back-up and restore messages and printer settings
- Large memory for all label formats to be stored locally.



Marking and Coding Machines
www.savema.com.tr





SVM 107-75 I // SVM 107-125 I // SVM 107 C

Specifications

	107-75 I	107 C
Print Area	Width 107mm Length 75mm	Width 107mm Length 125mm
	Width 107mm Length 125mm } Optional	
Resolution	12 dots/mm (300dpi) horizontally and vertically	
Print Speed	Up to 400mm / second	600mm / second
Production	200 prints/min (in one line)	250 prints/min
Thermal Ribbon	600 meter (656 yds.) loaded ribbon	
Memory	5000 text memory, 512 Mb. Ram, 1 Gb Storage (Onboard), Up to 8 Gb SD Memory Support, Up to 16 Gb USB Memory Support	
Power Supply	110/220/240 V 50/60 Hz	
Air Supply	min. 1 bar - max. 4 bar	
Wight (printer)	11,6 kg	
Dimensions	180mm H x 220mm W x 303mm D	
Outputs	Machine on error (failsafe) - image ready, power on, print per minute etc	
Ribbon Widths	55 mm. 110 mm. (2,2" - 4,28")	
Operating Temperature	5°- 50°C (41° -104°F)	
Control Panel	7" Touch Screen Panel	

Programming

Fields	Real DATE/Time. Text, Barcode, 2D Barcodes, Logo, Counter (Serial No), Shift Code, Shape, Currency
Barcodes	1 D Barcodes (EAN-13,EAN-8,CODE 128, CODE 39, ITF -2of 5,ITF 14, CODABAR UPC-A,UPC-E) 2 D Barcodes (Datamatrix, QR Codes. PDF 41 7, Aztec code.Semacode, Macro PDF 417) ITF14, RSS (GS-1 DATABAR COMPOSITE)
Communications	RS-232 (PC), LAN, USB Multi-language (14) support standard
Pc Programmes	SAYASIS Label Program

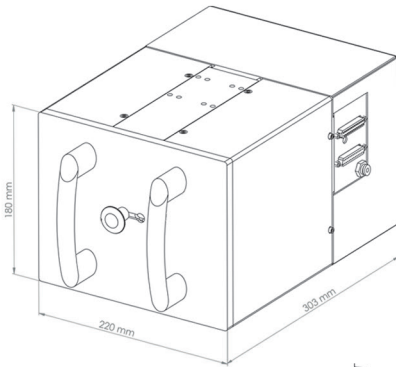

continuous



Intermittent