

THERMAL TRANSFER OVERPRINTERS SVM 32-40 I SVM 53-40 I MAGNETIC



SPECIFICATIONS

High performance, magnetic, low cost thermal transfer printers are versatile enough for printing fixed and variable text, data and graphics. It is ideal for reproducing bar codes, real time, sell-by dates, batch numbers, prices, source codes and much more. Brackets can be easily integrated to the machines such as vertical and horizontal form-fill-seal systems, primary labellers, thermo formers and overwrapping equipments. The units are suitable for intermittent applications within the food, pharmaceutical cosmetics and automobile spare parts industries has the capability to code all kinds of 1D barcodes and 2D datamatrix codes.

KEY FEATURES

- Patented long life mechanical design needs no maintenance
- 32mm x 40mm print area and 53x40 mm for intermittent applications
- 600 m ribbon capacity
- Print Quality 300dpi (12 dot / inch).
- The USB can be used to: - Move messages and configurations between printers for local based set-up
- Back-up and restore messages and printer settings
- Large memory for all label formats to be stored locally.

Savema

Marking and Coding Machines

www.savema.com.tr




SVM 32-40 I // SVM 53-40 I

Specifications

	32-40 I	53-40 I
Print Area	Width 32mm Length 40mm	Width 53mm Length 40mm
Resolution	12 dots/mm (300dpi) horizontally and vertically	
Print Speed	Up to 300mm/second	
Production	100 prints/min (in one line)	
Thermal Ribbon	600 meter (656 yds.) loaded ribbon	
Memory	5000 text memory, 512 Mb. Ram, 1 Gb Storage (Onboard), Up to 8 Gb SD Memory Support, Up to 16 Gb USB Memory Support	
Power Supply	110/220V 50/60 Hz	
Air Supply	Magnetic / Don't Need Air	
Weight (printer)	5,6 kg	
Dimensions	175mm H x 185mm W x 190mm D 175mm H x 190mm W x 210mm D	
Outputs	Machine on error (failsafe) - image ready, power on, print per minute etc	
Ribbon Widths	22 mm, 35 mm and 55 mm (0,9" -1,4"-2,2")	
Operating Temperature	5°- 50°C (41° -104°F)	
Control Panel	4,3" Touch Screen Panel	

Programming

Fields	Real DATE/Time. Text, Barcode, 2D Barcodes, Logo, Counter (Serial No), Shift Code, Shape, Currency
Barcodes	1 D Barcodes (EAN-13,EAN-8,CODE 128, CODE 39, ITF -2of 5,ITF 14, CODABAR UPC-A,UPC-E) 2 D Barcodes (Datamatrix, QR Codes. PDF 41 7, Aztec code.Semacode, Macro PDF 417) ITF14, RSS (GS-1 DATABAR COMPOSITE)
Communications	RS-232 (PC), LAN, USB Multi-language (14) support standard
Pc Programmes	SAYASIS Label Program

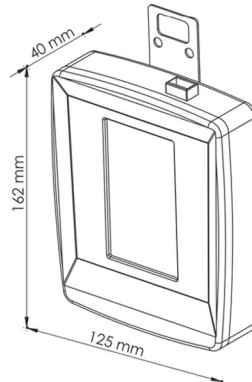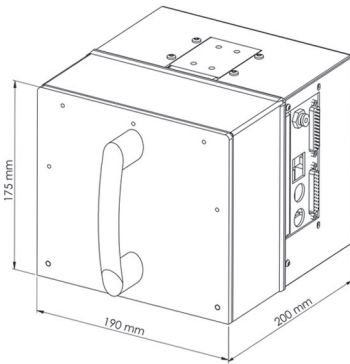

Intermittent

